


MOUNTING PROCEDURE**KIT LICENCE PLATE
DUCATI STREETFIGTHER****DS1104**WWW.BARRACUDAMOTO.COM**KIT**

- X1. LICENCE PLATE
- X4. SPECIFIC THICKNESS
- X4. WASHERS DIAMETER 6
- X4. ROUND HEAD SCREW 6X30

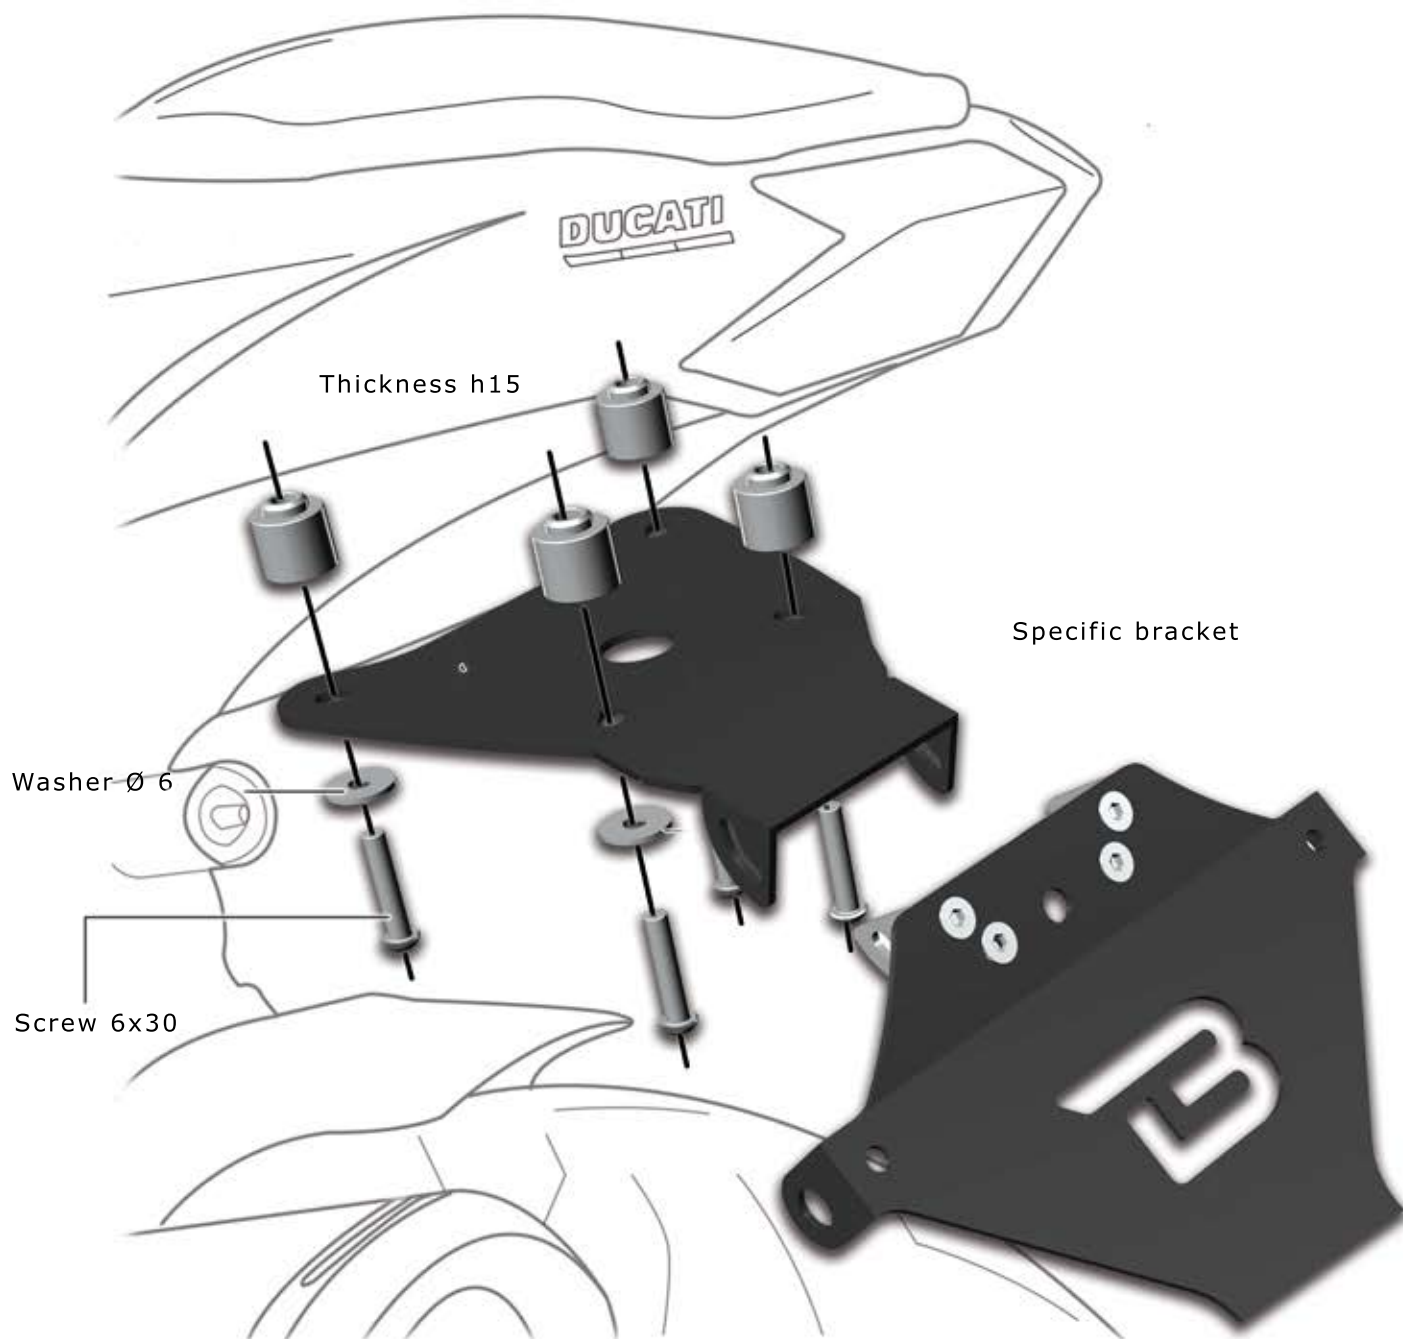

REMOVE THE ORIGINAL LICENCE PLATE. APPLY BARRACUDA LICENCE PLATE FIXING IT WITH ROUND HEAD SCREWS 6X30 LIKE THE PICTURE. INSERT THE THICKNESS HIGH 15MM BETWEEN THE LICENCE PLATE BRACKET AND THE MOTORBIKE UNDERTAIL. APPROACH AND LOCK THE LICENCE PLATE TO THE BRACKET JUST INSTALLED

WE ADVICE AN INCLINATION NOT EXCEEDING TO 30° TO AVOID SANCTIONS AND POSSIBLE DAMAGES.